


## RIG SPECIFICATIONS >> Deidrich D-120 (F-700 Ford Truck)

Our Truck-Mounted rigs provide easy mobilization & access to project sites.

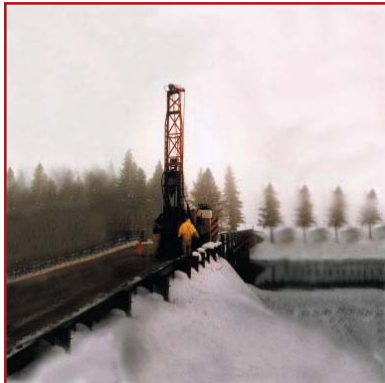

- Truck Mounted Drill (Fully Loaded): 29,500 lbs
- Drill Power: Deutz F6L-912 Diesel Engine
- Drill Rig Rotary Capacity: 3 – 6 inch diameter, 100 – 500 ft depth
- Drill Rig Auger Capacity: 4 – 12 inch diameter, 100 – 300 ft depth
- Drill Set-up Working Height: 27 feet
- Drill Mast-Down Height: 11 feet
- Drill Head Rotational Speeds: 55-850 RPM
- Water Pump: John Bean 35
- Winch Capacity: 5000 lbs at  $\pm 500$  l.f. / minute
- Drill Head Capacity: 20,000 lbs down, 30,000 lbs up
- Spindle Torque: Maximum 14,500 lbs
- Drill Cathead: 8 inch, 3 speeds
- Safety Sample Hammer: 140 lbs, 30 inch drop
- Automatic Standard Penetration Hammer available

TABER DRILLING

TEL 916.371.1690  
FAX 916.371.7265  
TOLL FREE 888.423.0573

[www.taberdrilling.com](http://www.taberdrilling.com)

